


3.0MW(S)

PMDD WIND TURBINE



3.0 MW(S) PMDD WIND TURBINE

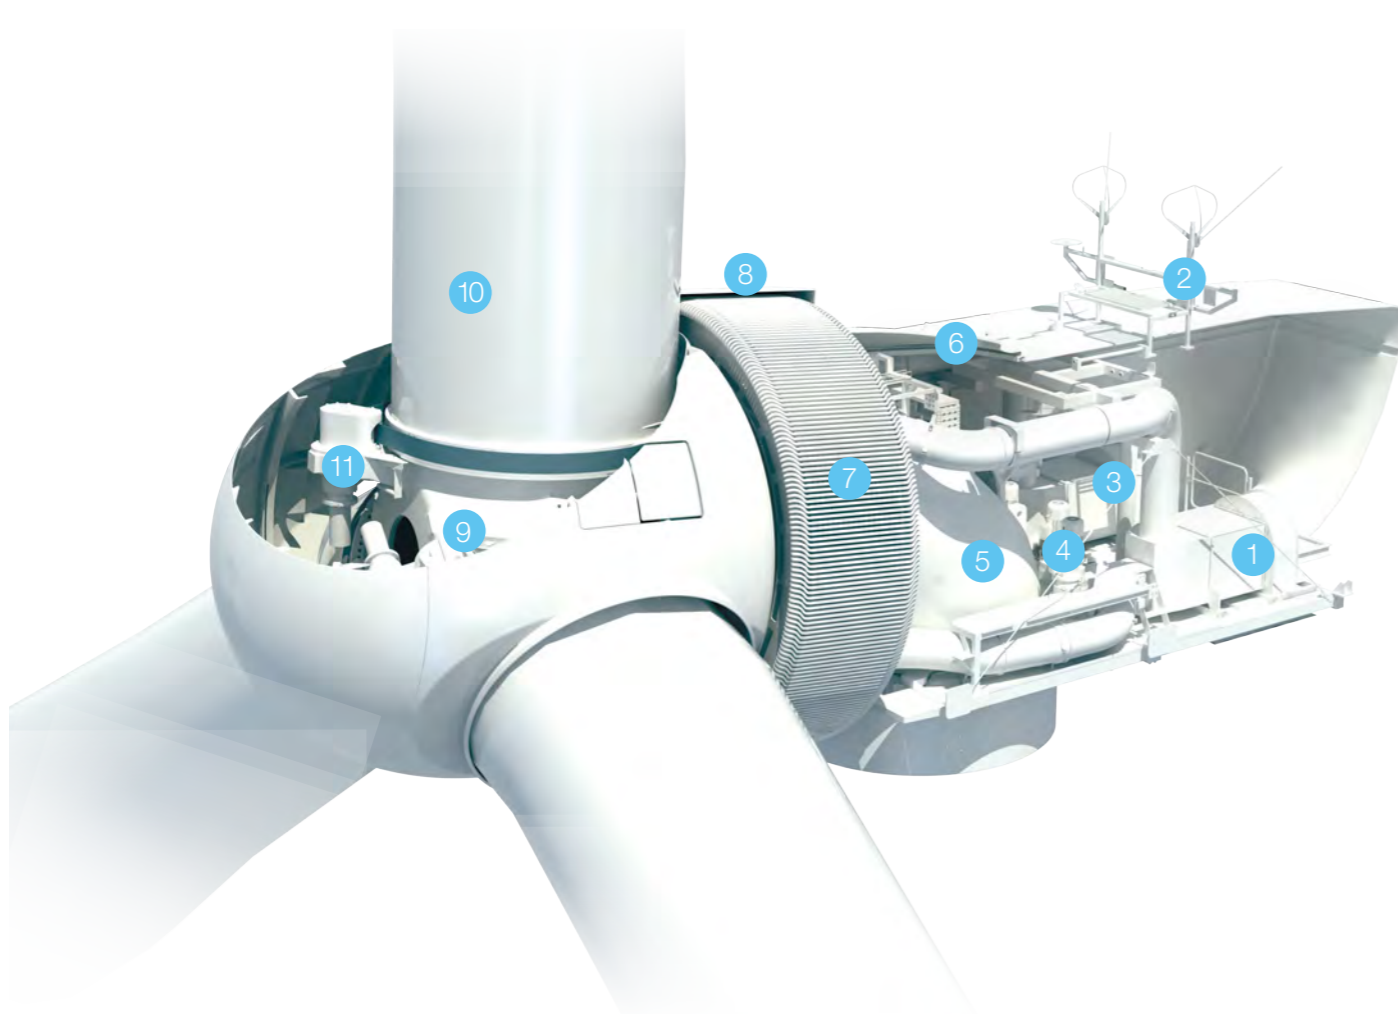

1. Generator Cooling System
2. Wind Measurement Equipment
3. Hoist
4. Yaw System
5. Nacelle Base
6. Nacelle Enclosure
7. Generator Stator
8. Generator Rotor
9. Hub
10. Blade
11. Pitch System

GOLDWIND 3.0MW(S) PMDD WIND TURBINE KEY FEATURES

Platform Evolution

- 20+ years of operational experience from 10,000+ Permanent Magnet Direct Drive (PMDD) wind turbines
- Evolution of the successful GW2500 platform with enhanced architectural features

High Efficiency

- Permanent Magnet Synchronous Generator (PMSG) eliminates excitation losses
- The absence of gearbox eliminates losses from ancillary systems such as lubricant distribution and thermal management

Smart Features

- Smart Sensing: Strategic sensors monitor key components, enabling predictive diagnostics and precision control
- Smart Control: Goldwind's big data analysis of 10,000+ installed direct-drive turbines and more than 20 years of wind energy expertise, have resulted in the most advanced algorithms
- Smart O&M: Platform includes a QR code data management system which is customizable to customer requirements for efficient logistics

High Reliability


- The gearless drivetrain design eliminates the possibility of gear failure during the operational life of the turbine
- Maintenance-free design of the toothed belt pitch drive system simplifies pitch system maintenance requirements
- PMSG does not require high maintenance slip rings for conducting power

Highly Adaptable

- Grid Adaptability: Excellent zero, low and high voltage ride through capability, and compliant with associated global standards
- Maintenance Adaptability: Dual circuit design of generator and converter enables partial operation when one circuit is compromised
- Environment Adaptability: Flexible operation modes enable adaptation to extreme environmental conditions such as high and low temperature, noise constraints and challenging wind conditions
- Construction Adaptability: Individual blade assembly to conserve site space constraints


DYNAMIC POWER CURVE

GW 140/3000(S)

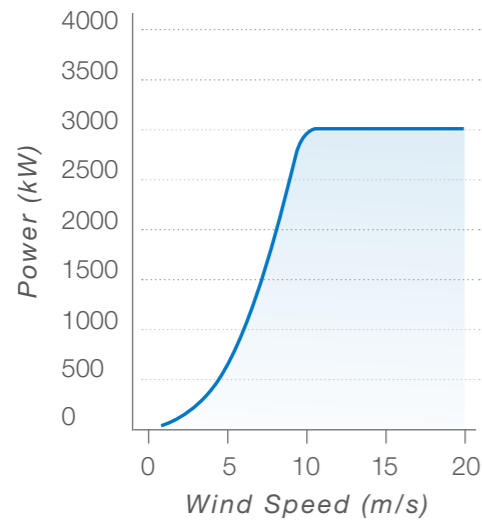


3.0MW


Air Density: 1.225kg/m³

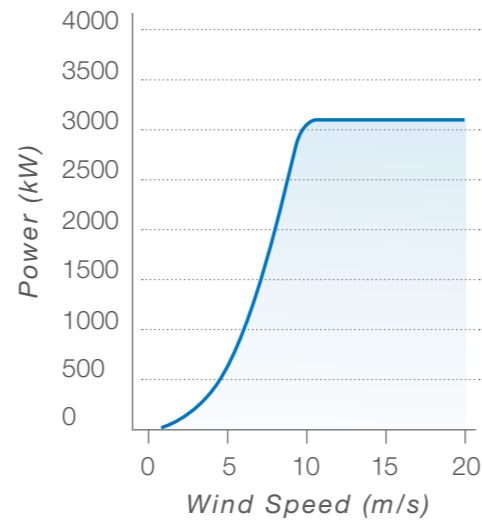


3.1MW

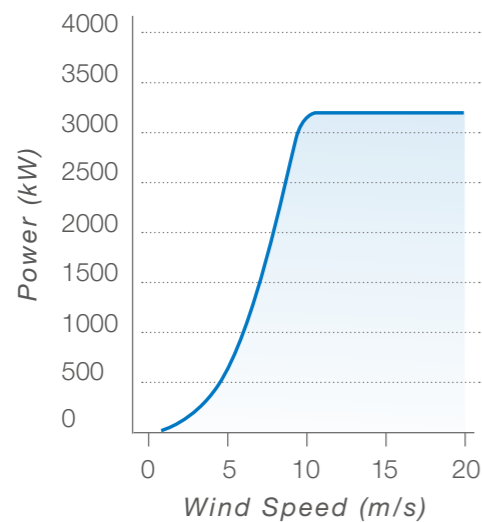

3.2MW

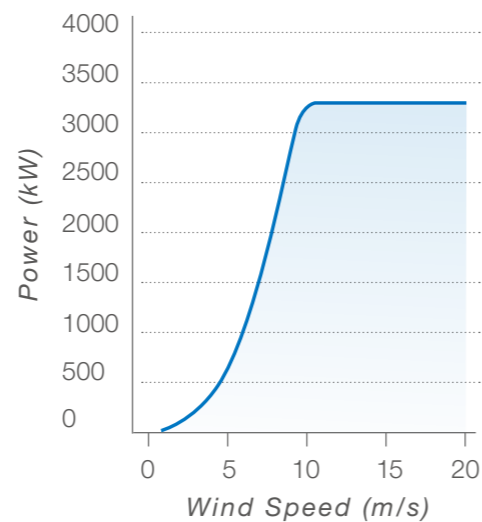

3.3MW

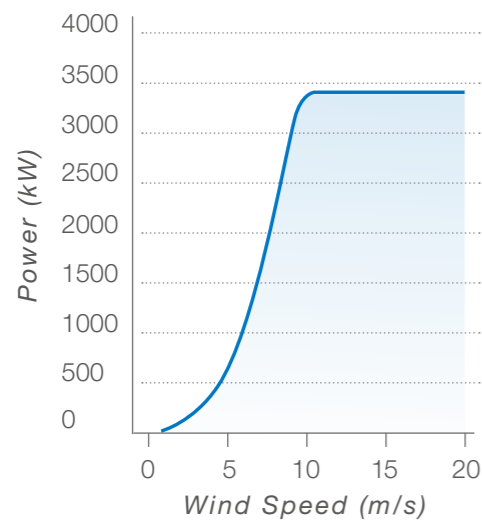

3.4MW

TECHNICAL SPECIFICATIONS

GW 3.0MW (S)				
Item	Unit	Specifications		
Model		GW 140/3000 (S) (onshore)		
Parameters				
Rated Power	kW	3000-3400		
Wind Class		IEC IIIA		
Cut-in Wind Speed	m/s	2.5		
Rated Wind Speed	m/s	11		
Cut-out Wind Speed	m/s	≥ 20 (customized based on the actual conditions of wind farm)		
Designed Service Life	Year	≥ 20		
Operating Temperature Range	°C	-30°C - +40°C		
Survival Temperature Range	°C	-40°C - +50°C		
Rotor System				
Rotor Diameter	m	136 / 140		
Rotor Swept Area	m ²	14712 / 15480		
Generator				
Generator Type		Permanent Magnet Synchronous Generator (PMSG)		
Rated Voltage	V	720		
Converter				
Converter Type		Full Power Conversion		
Power Factor Regulation Range	1/4 of rated power	Capacitive 0.95~inductive 0.95		
	2/4 of rated power			
	3/4 of rated power			
	Rated Power			
Rated Frequency	Hz	50/60		
Rated Output Power	kVA	3159-3579		
Rated Output Voltage	V	690		
Brake System				
Aerodynamic Brake System		Blade pitch triple-redundant		
Mechanical Brake System		Generator Brake (for maintenance)		
Yaw System				
Type/Design		Electric Motor Drive/Four Planetary Stages for Speed Reduction		
Yaw Brake		Four-point-contact Ball Bearing with Outer Ring		
Control System and Lightning Protection				
Type		PLC Control System		
Lightning Protection Standard		Compliant with IEC 61400-24-2010 and IEC 62305-2006, and in conformance with GL Standards for the Certification of Wind Turbines		
Ground Resistance	Ω	≤ 4		
Tower				
Type		Conical Steel/Hybrid Tower		
Hub height	m	100/Conical Steel	120/Hybrid Tower	140 (under planning and design)
Weight				
Rotor (including blades)	t	98		
Nacelle	t	40		
Generator	t	82		

INNOVATING FOR
A BRIGHTER FUTURE

 **GOLDWIND**

Goldwind Australia

Goldwind Australia Pty Ltd
T: +61 (2) 9008 1715
E: info@goldwindaustralia.com
W: goldwindaustralia.com

Sydney Office
Suite 2, Level 23,
201 Elizabeth Street
Sydney, NSW 2000

Melbourne Office
Level 7, 31 Queen Street
Melbourne, VIC 3000


GOLDWIND